



BOLLARD LIGHT SELECTION 2020





(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

BL-001

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w



BL-002

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w



BL-003

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



BL-004

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-005

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-006

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



BL-007

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-008

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)



BL-009

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

BL-010

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

BL-011

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

BL-012

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



BL-013

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-014

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-015

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)



(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)



(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

BL-016

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w , 22w , 25w ,27w ,30w

BL-017

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w , 22w , 25w ,27w ,30w

BL-018

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w , 22w , 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

BL-019

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-020

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards


- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

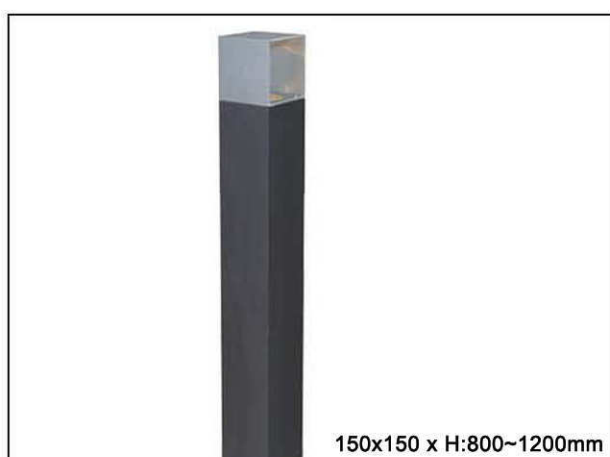

(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

BL-021

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



BL-021

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-022

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-023

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-025

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-026

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards


- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

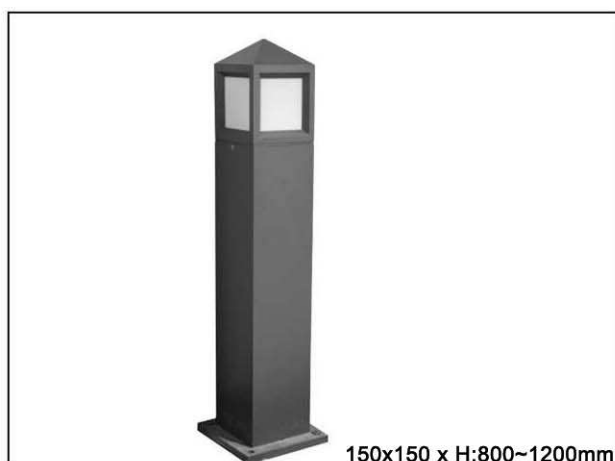

BL-027

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-028

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w , 22w, 25w ,27w ,30w



BL-029

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w , 22w, 25w ,27w ,30w



BL-030

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w , 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-031

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards


- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

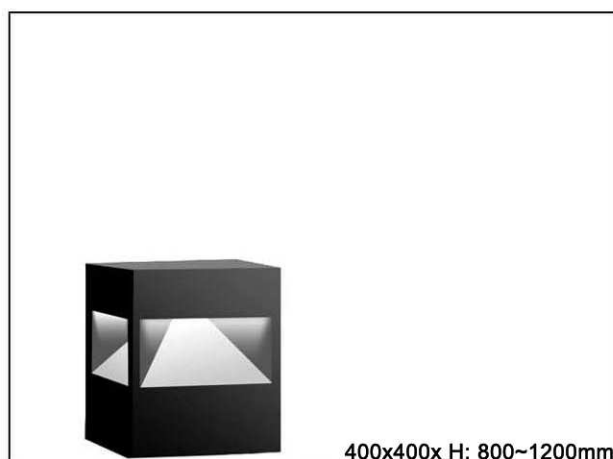

BL-032

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards


- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

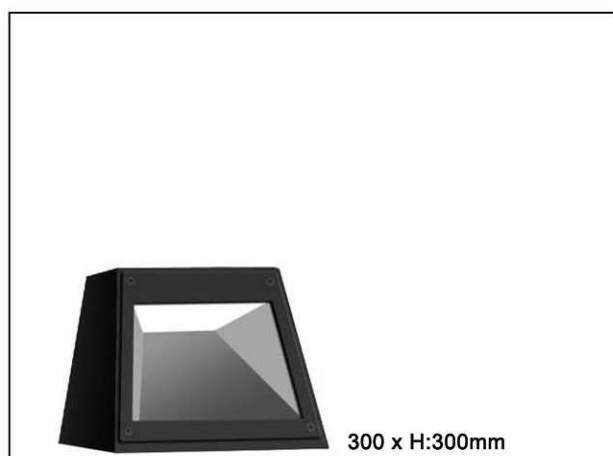

BL-033

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source


- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529

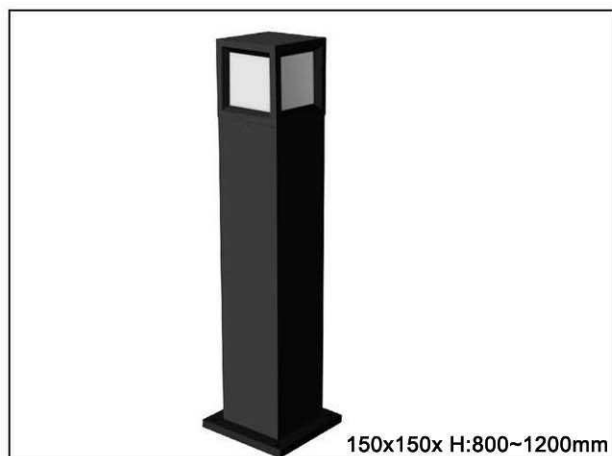

BL-034

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-035

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-036

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED


Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529

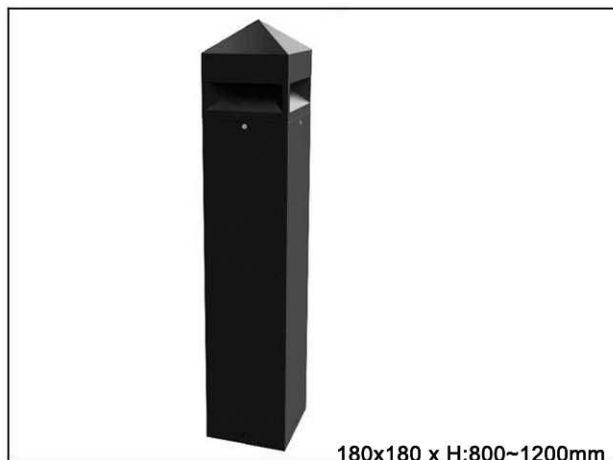

BL-037

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w



BL-038

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w



BL-039

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



BL-040

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards


- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

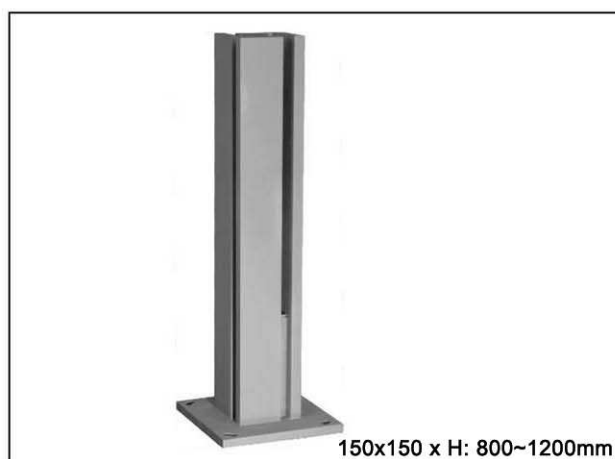

BL-041

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards


- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

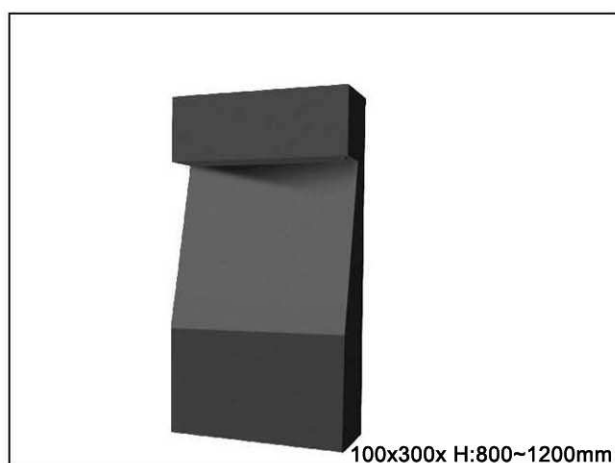

BL-042

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source


- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529

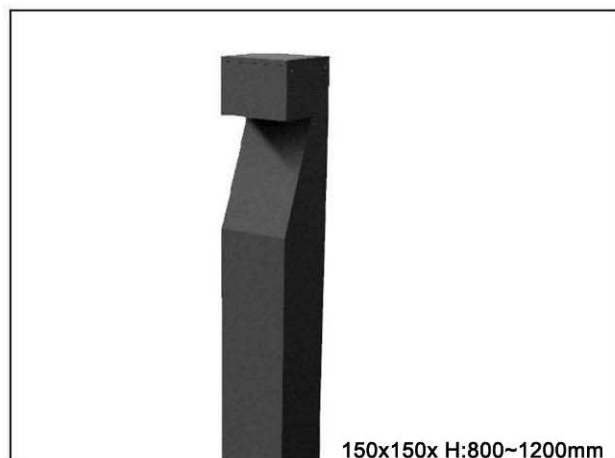

BL-043

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w



BL-044

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w



BL-045

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w ,22w ,25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-046

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-047

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-048

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-049

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-050

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-051

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-052

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w



BL-053

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w



BL-054

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



(remark : reinforced concrete bollard with 14mm thickness
Q235 Steel flanged base mounting as optional extra)

BL-055

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-056

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-057

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



BL-056

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-057

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-058

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-059

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-060

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-061

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-062

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-063

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-064

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1,IEC/EN 60598-2-1,
IEC/EN 60598-2-22,IEC/EN61347-1,
IEC/EN61347-2-13,IEC/EN62384,
IEC/EN61000-3-2,IEC/EN61547,
EN55015;IEC/EN62031;
IEC/EN60838-2-2,IEC/EN60529



BL-065

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-066

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-067

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529



BL-068

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w



BL-069

Description

- Aluminium body
- PC / PMMA Diffuser
- IP65

Standards

- IEC/EN 60598-1 & IEC/EN 60598-2-1

Light Source

- LED

Rating

- 10w ,12w ,15w ,18w ,20w, 22w, 25w ,27w ,30w

STANDARD

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60598-2-22, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 62384,
IEC/EN 61000-3-2, IEC/EN 61547,
EN 55015, IEC/EN 62031,
IEC/EN 60838-2-2, IEC/EN 60529