



► Color Options:

- Grey
- Black



Description

This LED spot light emits cool, natural, or warm white illumination for landscape lighting, parking lot lighting, tree uplighting, flagpole lighting, and architectural wall washing. This ultrathin LED spot light is also equipped with a UL-Recognized constant-current driver. This weatherproof LED spot light is constructed of dark black die cast aluminum with an adjustable knuckle-mount bracket for illumination where it's needed.

Features

- * Aluminum body
- * Tempered glass diffuser
- * Colour Temp.:
2000K / 2700K / 3000K~3500K / 4000K~4500K / 5000K~5500K / 6000K~6500K
- * General Luminous Efficacy: 85 lm/W
- * Power Factor: ≥ 0.95
- * CRI: ≥ 80 / ≥ 85 / ≥ 90
- * Voltage 100-277VAC
- * Heavy-duty cast aluminum housing is polyester powder coated to be rust and corrosion proof
- * Sealed fixture is dirt and bug free
- * Photocell is available
- * Life: Over 50,000 hours
-the lumen output deliver over 70% of its initial lumen output operating 35,000 hours

Standard

Designed and manufactured in accordance with
IEC/EN 60598-1, IEC/EN 60598-2-1,
IEC/EN 60838-2-2, IEC/EN 61347-1,
IEC/EN 61347-2-13, IEC/EN 61000-3-2,
IEC/EN 61547, EN 55015, IEC/EN 62031,
IEC/EN 62471.

Optional Items


Body Colour option:
Black colour ...RAL9008
Dark Gray colour ...RAL 7037
Light Gary colour ..RAL 7003
Aluminum Silver ..RAL 9006
White ...RAL 9010

Bracket option :
180 degree swing
360 degree swing

Ordering Information

Product number	Power	No./Module	Lumens	CCT/Ra	Input voltage	Beam angle	weight
LT-SL-10W	10W	CREE/COB	1000	3000-5000K Ra>80 Ra>90	AC12-24V AC220-240V AC120-277V	15°-18° 19°-23° 27°-36°	1kg
LT-SL-15W	15W		1500				
LT-SL-20W	20W		2000				
LT-SL-30W	30W		3000			15°-18° 19°-23° 27°-36° 55°-60°	2.1kg
LT-SL-40W	40W		4000				
LT-SL-60W	60W		6000				

Dimension(mm)

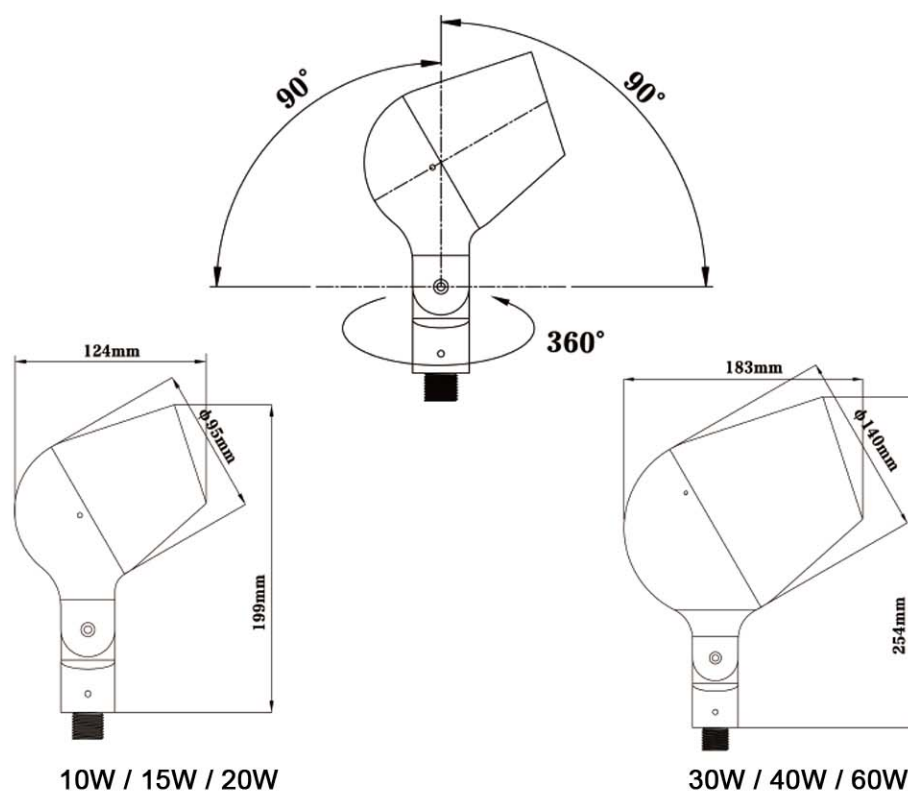

Mounting Options

LT-SL Series offers the widest variety of mounting options available.

Whether lighting up a tree from below or hanging a fixture from it, to using a ground spike, pole clamp or yoke arm, there is a mounting solution to suit every application.



GS Ground Stake
IMP-001



SB Surface Base Mount
IMP-002



TM Tree Mount
IMP-003



JB Junction Box
IMP-004



WM Wall Mount(USA)
IMP-005

Mounting Options

Enable planners to create impressive schemes that are ideally harmonised with the surrounding environment using individual, self-configured luminaire forms



IMP-006



IMP-007

Mounting Options

Enable planners to create impressive schemes that are ideally harmonised with the surrounding environment using individual, self-configured luminaire forms



IMP-008



IMP-009

Mounting Options

Enable planners to create impressive schemes that are ideally harmonised with the surrounding environment using individual, self-configured luminaire forms



IMP-010



IMP-011

Mounting Options

Enable planners to create impressive shemes that are ideally harmonised with the surrounding environment using individual, self-configured luminaire forms



IMP-012



IMP-013

Mounting Options

Enable planners to create impressive schemes that are ideally harmonised with the surrounding environment using individual, self-configured luminaire forms



IMP-014



IMP-015

Mounting Options



IMP-016



IMP-017



IMP-018



IMP-019



IMP-020



IMP-021