

PLAYLED.

PLAYLED.




General Data	
Item No.	UL-8W-COB-0800-FH
Power	8 watts ±10%
LED type	1 PC 8W TOYONIA COB LED
Luminous flux	10°:200~250, 40°:360~400 lm
CCT	2700K,3000K, 4000K, 6000K
CRI	80+
Beam angle	Zoomable 10° to 40° adjustable
Dimension	52 x 103 (mm) Diameter x Height
Cut out	/
Net weight	0.46 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~245V as standard (DC24V as options)
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer

Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard,silver color,black color, or powder coated painted in white color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=2mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With black PVC spike as standard
Round base	With SS304 round base as optional
Packaging	
Inner box size	180*105*65 mm
Carton size	55*23.5*14 cm (20 PCS / carton)

Passivated
Zoomable

3 Years Warranty

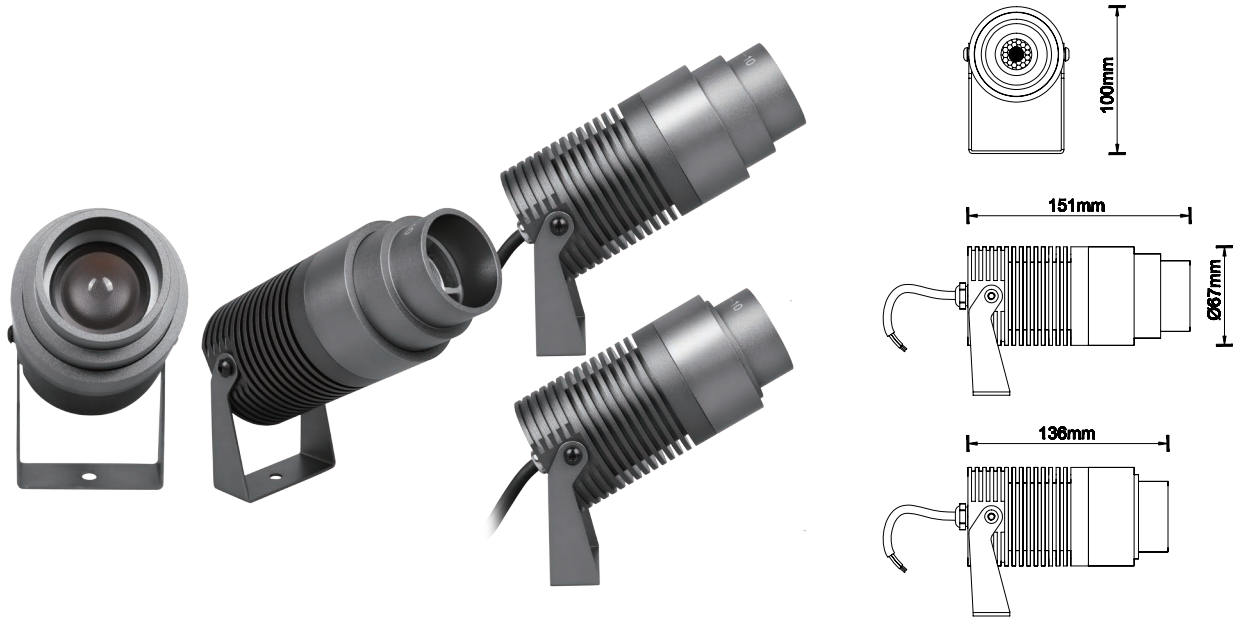

General Data	
Item No.	UL-15W-COB-1500-FH
Power	15 watts ±10%
LED type	1 PC 15W TOYONIA COB LED
Luminous flux	10°:450~500, 40°:750~800 lm
CCT	2700K,3000K, 4000K, 6000K
CRI	80+
Beam angle	Zoomable 10° to 40° adjustable
Dimension	67 x 151 (mm) Diameter x Height
Cut out	/
Net weight	0.8 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer


Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard,silver color,black color, or powder coated painted in white color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=2mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With black PVC spike as standard
Round base	With SS304 round base as optional
Packaging	
Inner box size	200*110*80 mm
Carton size	57.5*220*26 cm (15 PCS / carton)

Passivated
Zoomable


3 Years Warranty

Photometric Data (3000K, 40°) & Illumination Picture


Light Distribution Curve [Unit: cd]

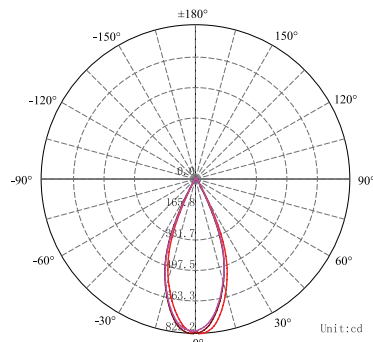

Lux distance Curve

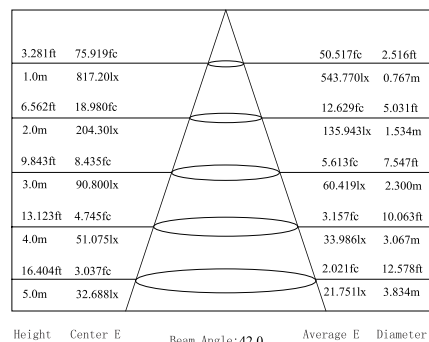


Illumination Picture

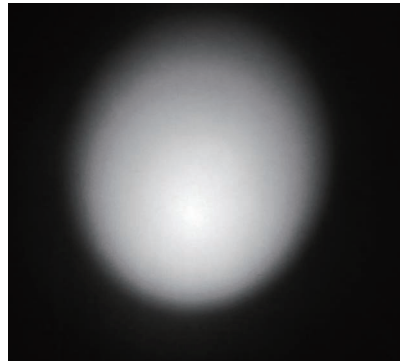


IP67 IK04

Photometric Data (3000K, 40°) & Illumination Picture

Light Distribution Curve [Unit: cd]

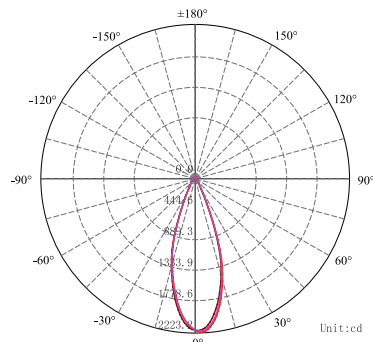

Lux distance Curve

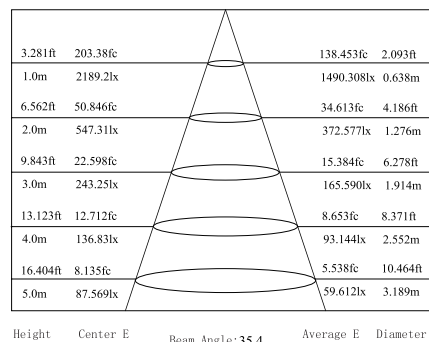

Illumination Picture



IP67 IK04



Standards


-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.

"Specification change without prior notification or public announcement."

www.Modernlite-light.com

GARDEN SPOT LIGHTS SERIES

GARDEN SPOT LIGHTS SERIES



PLAYLED.

PLAYLED.



General Data	
Item No.	UL-25W-COB-2500-FH
Power	25 watts ±10%
LED type	1 PC 25W TOYONIA COB LED
Luminous flux	10°:700~750, 40°:1250~1300 lm
CCT	2700K,3000K, 4000K, 6000K
CRI	80+
Beam angle	Zoomable 10° to 40° adjustable
Dimension	89 x 212 (mm) Diameter x Height
Cut out	/
Net weight	1.68 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer

Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard,silver color,black color, or powder coated painted in white color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=2mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With black Aluminium spike as standard
Round base	With SS304 round base as optional
Packaging	
Inner box size	250*155*110 mm
Carton size	49*27*24 cm (6 PCS / carton)


Passivated

Zoomable


3 Years Warranty

Photometric Data (3000K, 40°) & Illumination Picture


Light Distribution Curve [Unit: cd]

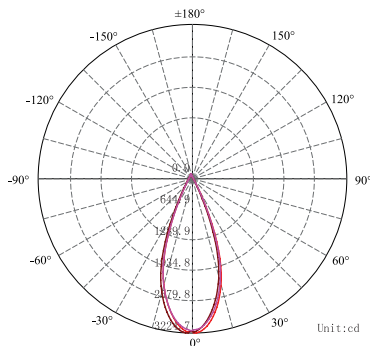


Lux distance Curve

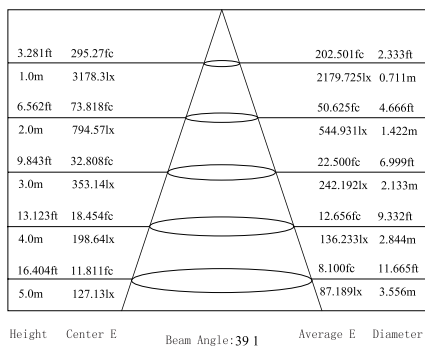

Illumination Picture

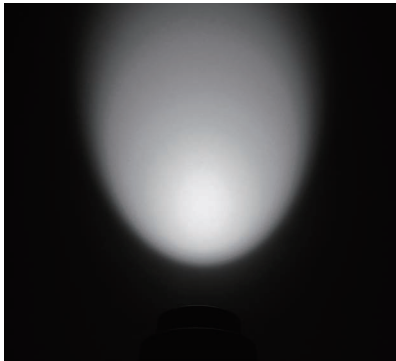

IP67 IK04

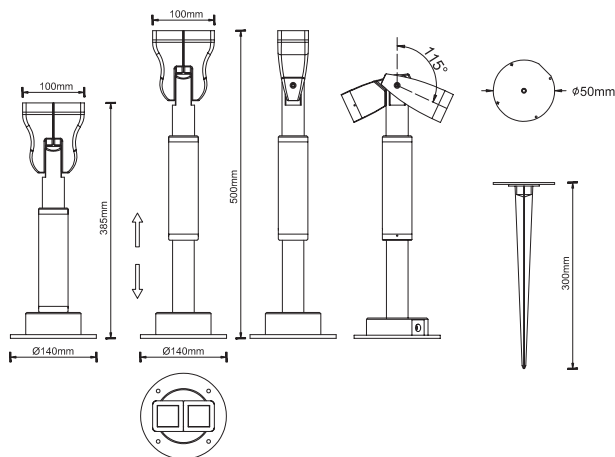

General Data	
Item No.	UL-1018-1500-A
Power	15 Watts
LED type	2 PCS 7.5W CREE CXA1304 COB LED
Luminous flux	750~800 lm
CCT	2700K,3000K, 4000K, 6000K
CRI	80+
Beam angle	15°, 25°
Dimension	140 x 385 to 500 (mm) adjustable Diameter x Height
Cut out	/
Net weight	2.8 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V
Insulation class	Class I
Cable	1PC rubber cable 0.5M H05RN-F 3x0.75mm square
Driver	Built-in high voltage constant current driver with transformer

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Black color as standard.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	120 kgs
Cable Gland	IP65 Aluminium part
Gasket	PMQ silicone seal
Accessories	
Spike	With Aluminium spike
Round base	With round base and screws
Packaging	
Inner box size	430*180*160 mm
Carton size	43*18*16 cm (1PC / Carton)

Passivated

3 Years Warranty

Photometric Data (3000K,25°) & Illumination Picture

Illumination Picture



IP65 IK04




Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.

"Specification change without prior notification or public announcement."



www.Modernlite-light.com





PLAYLED.

PLAYLED.

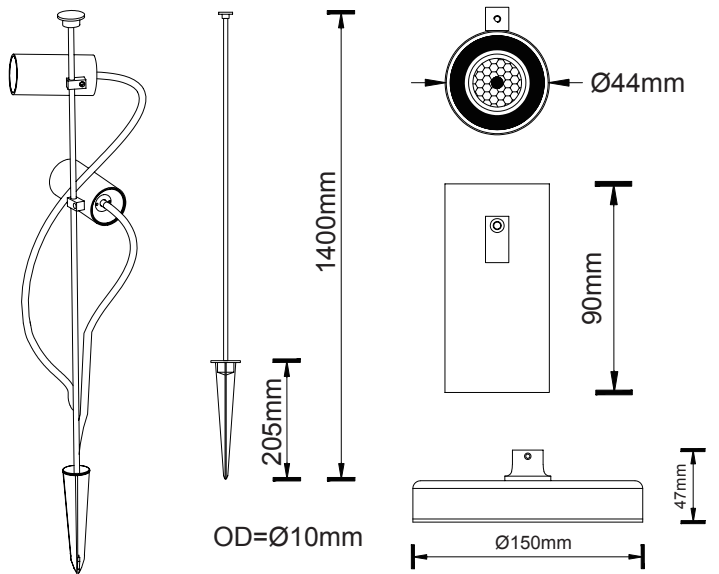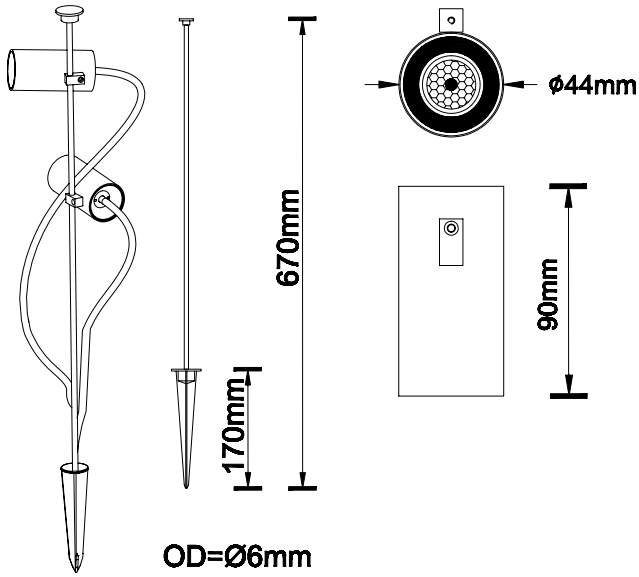

GARDEN SPOT LIGHTS SERIES

General Data	
Item No.	UL-1010-0500-EH
Power	5 watts
LED type	1 PC 5W CREE COB LED
Luminous flux	350~400 lm
CCT	2700K,3000K, 4000K, 6000K
CRI	80+
Beam angle	15°,24°
Dimension	44 x 90 (mm) Diameter x Height
Cut out	/
Net weight	0.3 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V as standard(DC 12V or DC 24V as optional)
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer


Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard,silver color,black color, or powder coated painted in white color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With 500mm stainless steel 304 stake +170mm Aluminium spike
Packaging	
Inner box size	116*95*48 mm
Carton size	49*25*16 cm (30 PCS / carton)

Passivated


3 Years Warranty

Photometric Data (3000K, 24°) & Illumination Picture

Light Distribution Curve [Unit: cd]

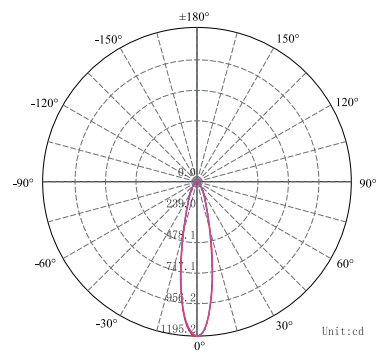

Lux distance Curve

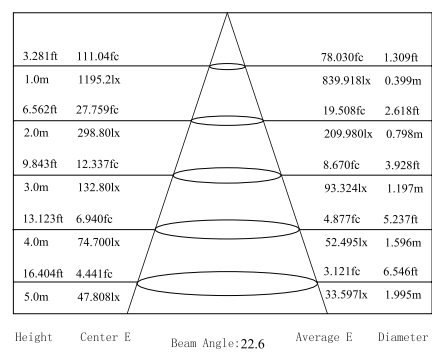

Illumination Picture



IP65 IK04

General Data	
Item No.	UL-1010-0500-EH(LT-08)
Power	5 watts
LED type	1 PC 5W CREE COB LED
Luminous flux	350~400 lm
CCT	2700K,3000K, 4000K, 6000K
CRI	80+
Beam angle	15°,24°
Dimension	44 x 90 (mm) Diameter x Height
Cut out	/
Net weight	0.3 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V as standard(DC 12V or DC 24V as optional)
Insulation class	Class I
Cable	1PC rubber cable 1M or 2M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer


Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard,silver color,black color, or powder coated painted in white color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With 1200mm stainless steel 304 stick +205mm Aluminium spike optional
Round base	Round base for surface mounting as options
Packaging	
Inner box size	116*95*48 mm
Carton size	49*25*16 cm (30 PCS / carton)

Passivated


3 Years Warranty

Photometric Data (3000K, 24°) & Illumination Picture

Light Distribution Curve [Unit: cd]

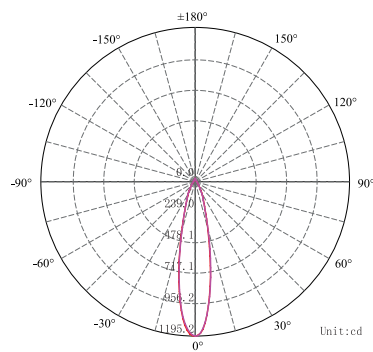

Lux distance Curve

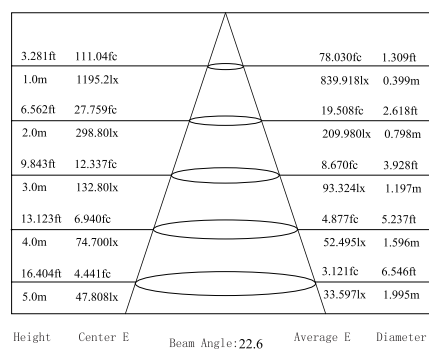

Illumination Picture



IP65 IK04



Standards


-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.

"Specification change without prior notification or public announcement."

www.Modernlite-light.com



PLAYLED.

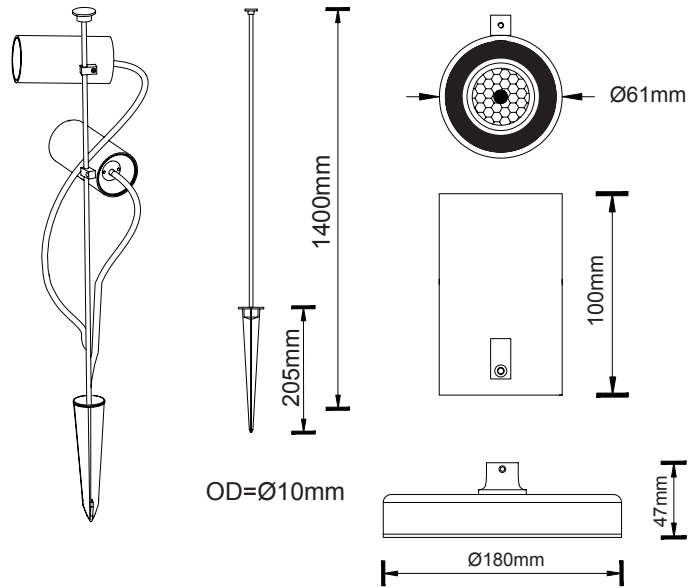


General Data	
Item No.	UL-15W-COB-1200-EH
Power	12 watts $\pm 10\%$
LED type	1 PC 12W CREE COB LED
Luminous flux	1200 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	15°, 23°, 38°, 45°, 60°
Dimension	61 x 100 (mm) Diameter x Height
Cut out	/
Net weight	0.55 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100-265V as standard(DC 24V as optional)
Insulation class	Class I
Cable	1PC rubber cable 1M or 2M H05RN-F 3x1mm square
Driver	Built-in high voltage constant current driver with transformer

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25 μ m thickness anodized film for housing .Dark grey as standard, silver color, black color, or powder coated painted in white color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass, T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With 1200mm stainless steel 304 stick +205mm Aluminium spike optional
Round base	Round base for surface mounting as options
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26 cm (18 PCS / carton)


Passivated 3 Years Warranty

Photometric Data (3000K, 23°) & Illumination Picture

Light Distribution Curve [Unit: cd]

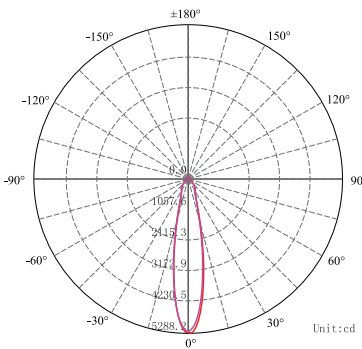

Lux distance Curve

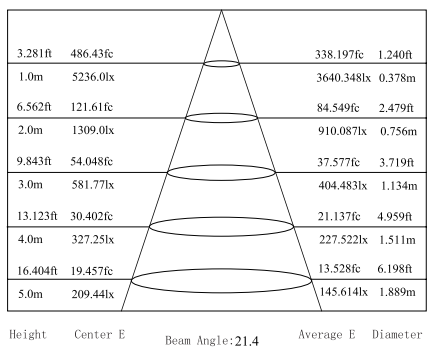

Illumination Picture



CE RoHS COMPLIANT IP65 IK04

GARDEN SPOT LIGHTS SERIES



PLAYLED.




General Data	
Item No.	UL-1010-0600(RGB)-A
Power	6 Watts
LED type	1 PC 6W RGB SMD5050 LED
Luminous flux	200 lm (ALL RGB LEDS ON)
CCT	RGB
CRI	70+
Beam angle	25° (Optional 38°)
Dimension	42 x 75 (mm) Diameter x Height
Cut out	/
Net weight	0.38 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1.5M H05RNF 4x0.75mm square
Driver	Low voltage constant current output ,excluding the transformer

Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey standard,silver color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	220 kgs
Cable Gland	PG9 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	116*95*48 mm
Carton size	49*25*16 cm (30 PCS / carton)

Passivated 3 Years Warranty

Photometric Data (RGB, 25°) & Illumination Picture


Light Distribution Curve [Unit: cd]

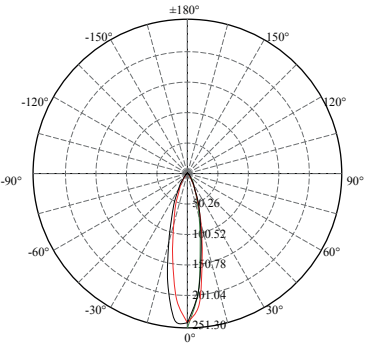


Lux distance Curve

Illuminance at a Distance			
	Center Beam LUX	Beam Width	
		V	H
2m	60.71 LUX	0.8m	0.9m
4m	15.18 LUX	1.7m	1.8m
6m	6.75 LUX	2.5m	2.7m
8m	3.79 LUX	3.3m	3.6m
10m	2.43 LUX	4.2m	4.5m
12m	1.69 LUX	5.0m	5.4m
Vert.Spread 23.5		Horiz.Spread 25.3	

Illumination Picture

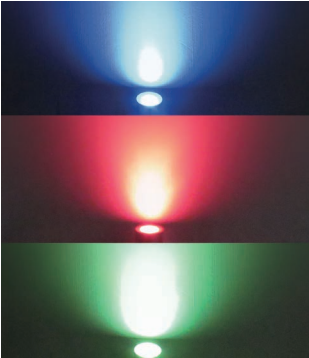

CE RoHS COMPLIANT IP67 IK04



PLAYLED.

PLAYLED.



General Data	
Item No.	UL-1010-0500(RGBW)-A
Power	5 Watts
LED type	1 PC 5W RGBW5500K 4in1 COB LED
Luminous flux	/
CCT	RGBW5500K
CRI	/
Beam angle	10°,23°,38°
Dimension	44 x 77 (mm) Diameter x Height
Cut out	/
Net weight	0.4 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1.5M H05RN-F 5x0.5mm square
Driver	Low voltage constant current output ,excluding the transformer


Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey standard,silver color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=2mm.
Loading capacity	220 kgs
Cable Gland	PG9 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	116*95*48 mm
Carton size	49*25*16 cm (30 PCS / carton)

Passivated


3 Years Warranty

Photometric Data (RGBW5500K, 23°) & Illumination Picture


Light Distribution Curve [Unit: cd]

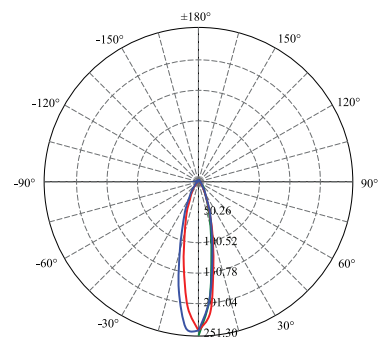

Lux distance Curve

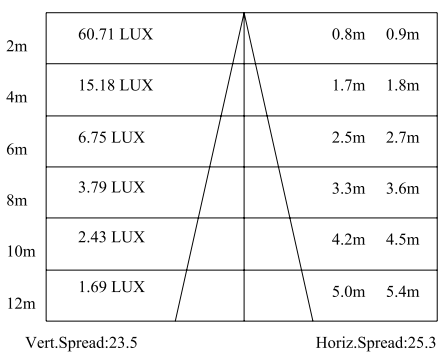

Illumination Picture

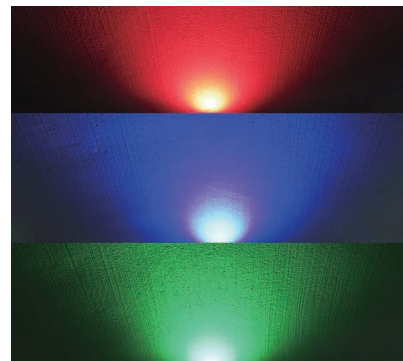

IP67 IK04



General Data	
Item No.	UL-1012-1200(RGBW)-A
Power	12 Watts
LED type	1 PC 12W OSRAM RGBW LED (3R3G3B3W)
Luminous flux	810 lm (ALL RGBW LEDS ON)
CCT	RGB +6000K or 3000K/2700K/4000K/5500K
CRI	70+
Beam angle	30°
Dimension	61 x 113 (mm) Diameter x Height
Cut out	/
Net weight	0.52 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1.5M H05RN-F 5x0.75mm square
Driver	Low voltage constant current output ,excluding the transformer


Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey standard,silver color as options.
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	220 kgs
Cable Gland	PG9 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	130*115*80mm
Carton size	36.5*28*26cm (18PCS / carton)

Passivated


3 Years Warranty

Photometric Data (RGB+CW6000K, 30°) & Illumination Picture

Light Distribution Curve [Unit: cd]

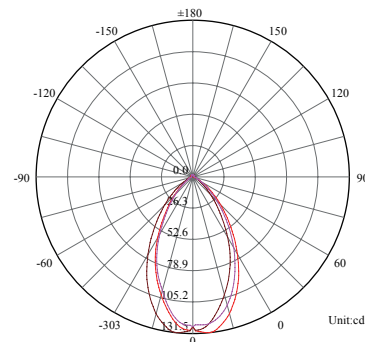

Lux distance Curve

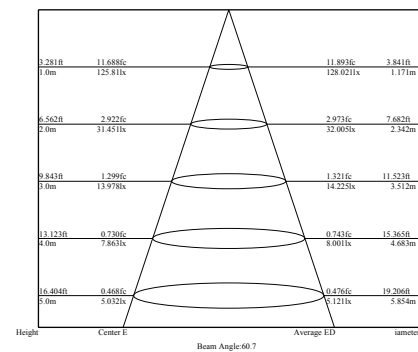

Illumination Picture



IP67 IK04



PLAYLED.



General Data	
Item No.	UL-1012-GU10-A-70
Power	/
LED type	Without GU10 lamp as standard,with GU10 lamp as options.
Luminous flux	/ for fitting GU10 lamp with totally height 70mm at max (including pins)
CCT	/
CRI	/
Beam angle	/
Dimension	61 x 110 (mm) Diameter x Height
Cut out	/
Net weight	0.53 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC 90~265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	/

Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26cm (18PCS each carton)

Passivated

3 Years Warranty

Application Picture



IP67 IK04



Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.



PLAYLED.



General Data	
Item No.	UL-1012-GU10-A
Power	/
LED type	Without GU10 lamp as standard,with GU10 lamp as options.
Luminous flux	/ for fitting GU10 lamp with totally height 54mm at max (including pins)
CCT	/
CRI	/
Beam angle	/
Dimension	61 x 95 (mm) Diameter x Height
Cut out	/
Net weight	0.48 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC 90~265V
Insulation class	Class I
Cable	1PC rubber cable 1M H05RN-F 3x1mm square
Driver	/

Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26cm (18PCS each carton)

Passivated

3 Years Warranty

Application Picture



IP67 IK04

"Specification change without prior notification or public announcement."

www.Modernlite-light.com

GARDEN SPOT LIGHTS SERIES

GARDEN SPOT LIGHTS SERIES



PLAYLED.



GARDEN SPOT LIGHTS SERIES

General Data	
Item No.	UL-1012-MR16-A-54
Power	/
LED type	Without MR16 lamp as standard, with MR16 lamp as options.
Luminous flux	/ for fitting MR16 lamp with totally height 54mm at max (including pins)
CCT	/
CRI	/
Beam angle	/
Dimension	61 x 95(mm) Diameter x Height
Cut out	/
Net weight	0.53 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 1M H05RN-F 2x1mm square
Driver	/

Construction Data	
IP rating	IP67 Waterproof
IK rating	IK04
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Passivated (Anodizing) Aluminum
Glass	Step tempered Glass.T=3mm.
Loading capacity	220 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Spike	With PVC spike as spike spot lights (Standard)
Round base	With SS304 round base for wall mounting (optional)
Packaging	
Inner box size	130*115*80 mm
Carton size	36.5*28*26cm (18PCS each carton)

Passivated

3 Years Warranty

Application Picture



IP67 IK04




Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.



"Specification change without prior notification or public announcement."

www.Modernlite-light.com



PLAYLED.

PLAYLED.

Optional Accessories for Garden Spot Lights Series Spike

Spike-175		Specifications PVC spike for ground spike installation. Ø39X175 mm(DiameterxLength),black color,with screws M4*10mm	Suitable for items: UL-1004-0300-A,UL-4002-0400-A,UL-1010-0500-BH,UL-1010-0500-CH,UL-1010-0800-AH / UL-1010-0800-BH,UL-1010-0800-BH,UL-1010-0900(RGB)-A,UL-1010-1200(RGBW)-A,UL-1012-1200-AH,UL-15W-COB-1500-BH,UL-1019-1200-AH,UL-12W-COB-1200-BH,UL-8W-COB-0800-BH,UL-1012-MR16-A-54,UL-1012-GU10-A-70,UL-1012-GU10-A,UL-8W-COB-0800-FH,UL-15W-COB-1500-FH,UL-1010-0500(RGBW)-A
Spike-160		Specifications Aluminium spike for ground spike installation. Ø40X160 mm(DiameterxLength), black color as standard,dark grey color or silver color optional,with screws M4*10mm	Suitable for items: UL-1010-0500-BH,UL-1010-0500-CH,UL-1010-0800-AH / UL-1010-0800-BH,UL-1010-0800-BH,UL-1010-0900(RGB)-A,UL-1010-1200(RGBW)-A,UL-8W-COB-0800-AH,UL-1012-1200-AH,UL-15W-COB-1500-BH,UL-1019-1200-AH,UL-12W-COB-1200-BH,UL-1012-MR16-A-54,UL-1012-GU10-A-70,UL-1012-GU10-A,UL-8W-COB-0800-FH,UL-15W-COB-1500-FH,UL-1010-0500(RGBW)-A
Spike-205		Specifications Aluminium spike as options for the above spot lights. so that it can be for ground spike installation. Ø40X205 mm(DiameterxLength), black color as standard,dark grey color or silver color optional,with screws M6*10mm	Suitable for items: UL-8W-COB-0800-AH,UL-1012-1200-AH,UL-1010-1200(RGBW)-A,UL-15W-COB-1500-BH,UL-1019-1200-AH,UL-12W-COB-1200-BH,UL-1012-MR16-A-54,UL-1012-GU10-A-70,UL-1012-GU10-A,FL-7001-0700-AH,FL-7001-1400-AH,UL-25W-COB-2500-BH,UL-15W-COB-1500-FH,UL-25W-COB-2500-FH
Spike-260		Specifications Aluminium spike as options for the above spot lights. so that it can be for ground spike installation. Ø60X260 mm(DiameterxLength), black color as standard,dark grey color or silver color optional,with screws M6*10mm For garden spot light series	Suitable for items: FL-1701-1700-AH,FL-1701-3400-AH,FL-3601-3600-AH ,FL-3601-5000-AHFL,FL-3600-RGB-A,UL-25W-COB-2500-BH,UL-25W-COB-2500-FH

Round base

Round Base-75		Specifications 75mm Stainless steel 304 base as options for the above spot lights. so that it can be for wall surface mounted installation. For garden spot light series	Suitable for items: All of garden spot lights series
Black Round Base-75		Specifications Powder caoated painted in black or dark grey 75mm Stainless steel 304 base as options for the above spot lights. so that it can be for wall surface mounted installation. For garden spot light series	Suitable for items: All of garden spot lights series

Shield(Snoot / Hood)

Shield-46		Specifications Anti-glare Shield (Snoot / Hood) for garden spot lights. 46mm diameter. Passivated dark grey color as standard, black,silver color or painted in white color as options	Suitable for items: UL-1010-0500-BH UL-1010-0500-CH UL-1010-0900(RGB)-A
Shield-48		Specifications Anti-glare Shield (Snoot / Hood) for garden spot lights. 48mm diameter. Passivated dark grey color as standard, black,silver color or painted in white color as options	Suitable for items: UL-1010-0800-AH / UL-1010-0800-BH UL-1010-0800-BH
Shield-65		Specifications Anti-glare Shield (Snoot/ Hood) for garden spot lights. UL-1012, UL-1012-1200-AH,UL-1012-1200(RGBW)-A,UL-15W-COB-1500-BH,UL-1012-GU10-A-70,UL-1012-GU10-A-56,UL-1012-MR16-A-56 65mm diameter. Passivated dark grey color as standard, black,silver color or painted in white coloras options	Suitable for items: UL-1010-1200(RGBW)-A UL-1012-1200-AH UL-15W-COB-1500-BH UL-1019-1200-AH UL-1012-MR16-A-54 UL-1012-GU10-A-70 UL-1012-GU10-A
Shield-93		Specifications Anti-glare Shield (Snoot/ Hood) for garden spot light. 93mm diameter. Passivated dark grey color as standard, black,silver color or painted in white color as options	Suitable for items: UL-25W-COB-2500-BH

Belt

Belt-2M		Specifications Belt for Garden spot lights tree installation Included 1 PC Stainless steel 304 fixed part for 1 PC fixture surface mounted. (More fixed parts are as optional) 2M Nylon materials belt in black	Suitable for items: All of garden spot lights series
---------	---	---	--

GARDEN SPOT LIGHTS SERIES

GARDEN SPOT LIGHTS SERIES



Specialized in Exterior LED Lighting

WALL LIGHTS SERIES

Products Features

These products are designed with special design milky white glass trim or the plated aluminium trim, Aluminum housing ,with passivated (anodizing) anti-corrosion finishing for housing or anodized / plated aluminium housing, optics PMMA lens with wonderful light output,silicone gasket and cable gland for waterpoo IP65 or IP67 and high quality CREE LED, EPISTAR LED.

We make several series of wall lights to meet different application,and even the wall lights with lithium battery that's used as emergency lights, the wall lights with touched controlled trim for dimming,turning off or on series are available.

These products are with CE,RoHS certifications,and the SAA,PSE,UL or ETL certifications will be available in the coming future.

Application


These lights are widely used in the exterior or interior application,such as lighting stairs, corner of walls for the house, hotel, the garden,the park etc.


Passivated

3 Years Warranty





IP65 IP67 IK06

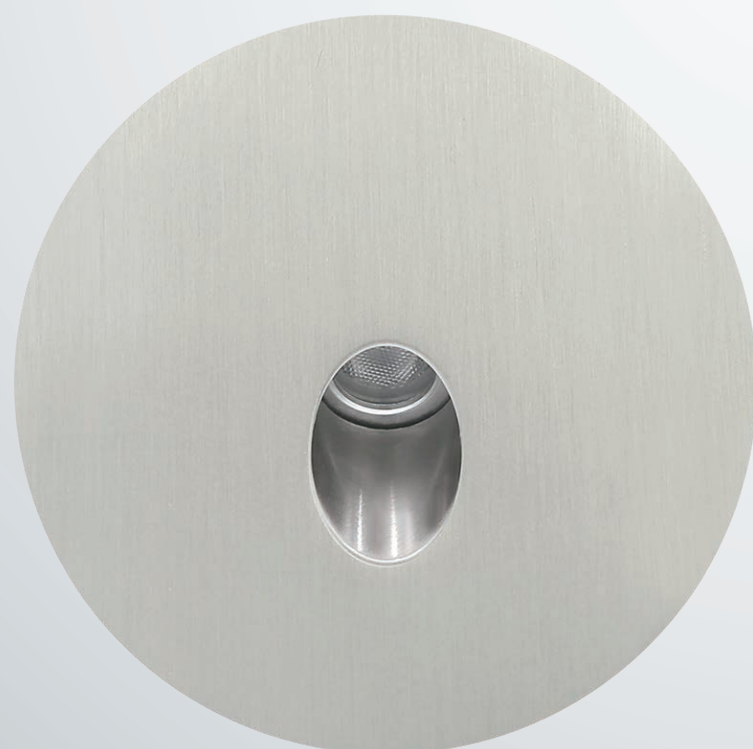



PLAYLED.

PLAYLED.

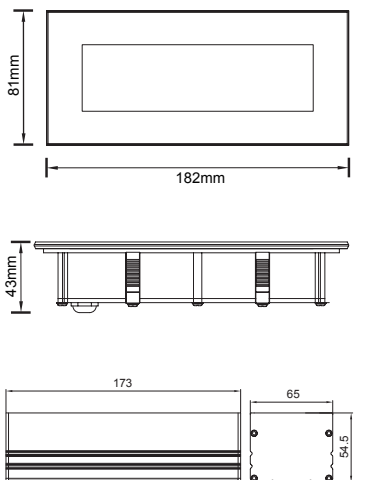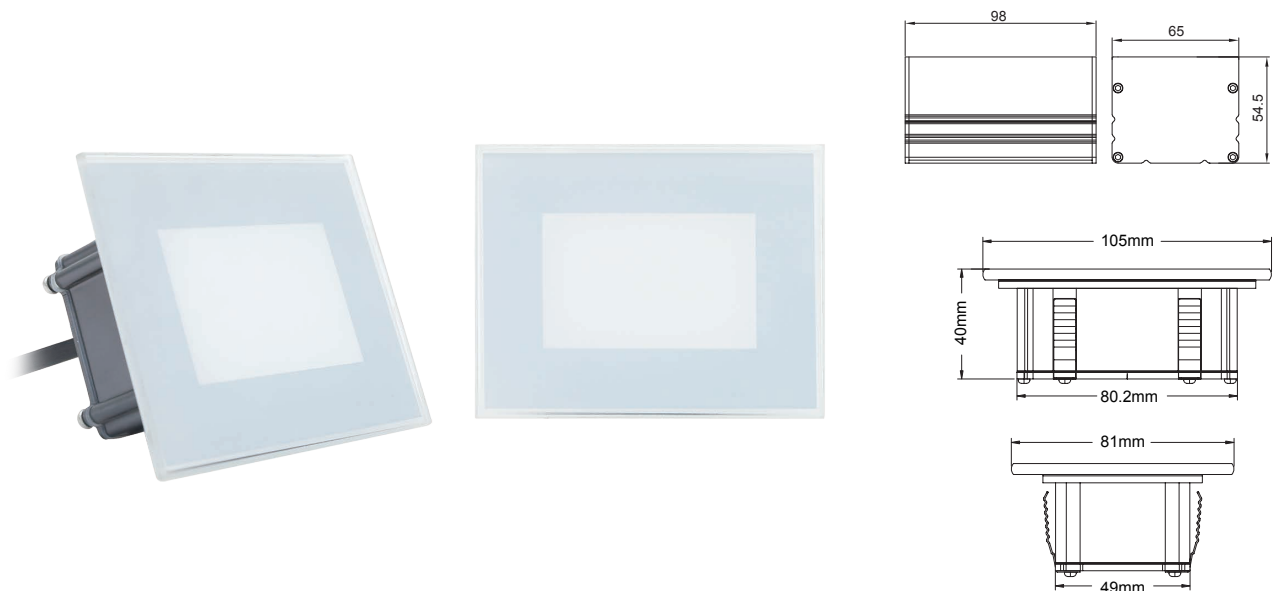

WALL LIGHTS SERIES

General Data	
Item No.	SP-001-0400-AH
Power	4 Watts
LED type	30 pcs 2835 SMD LED
Luminous flux	100~120 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120°
Dimension	105x81x40 mm (Length x Wide x Height)
Cut out	98x65x54.5 mm
Net weight	0.369 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~240V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey as standard, painted in white as options
Trim	Tempered glass painted in milky white
Glass	Tempered Glass.T=4mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	Flat PMQ silicone seal
Accessories	
Mounting box	Aluminum
Packaging	
Inner box size	130*105*80 mm
Carton size	54*28.5*34 cm (32 PCS/carton)

Passivated

3 Years Warranty

General Data	
Item No.	SP-005-0800-AH
Power	8 Watts
LED type	42 pcs 2835 SMD LED
Luminous flux	190~210 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120°
Dimension	182x81x43 mm (Length x Wide x Height)
Cut out	173 x 65 x 54.5 mm
Net weight	0.373 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~240V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Tempered glass painted in milky white
Glass	Tempered Glass.T=4mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	Flat PMQ silicone seal
Accessories	
Mounting Sleeve	Aluminum
Packaging	
Inner box size	208*105*70 mm
Carton size	42*22*46 cm (24 PCS / carton)


Passivated

3 Years Warranty


WALL LIGHTS SERIES

Photometric Data (3000K, 120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

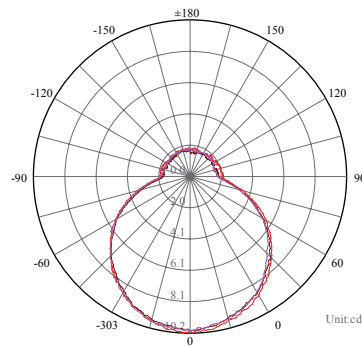

Lux distance Curve

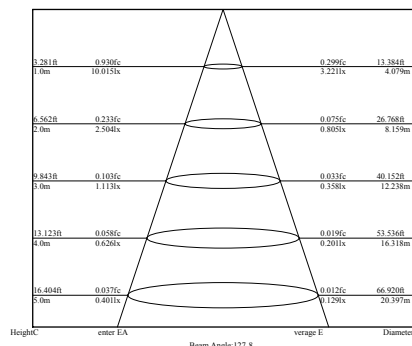


Illumination Picture




IP65 IK06

Photometric Data (3000K, 120°) & Illumination Picture


Light Distribution Curve [Unit: cd]

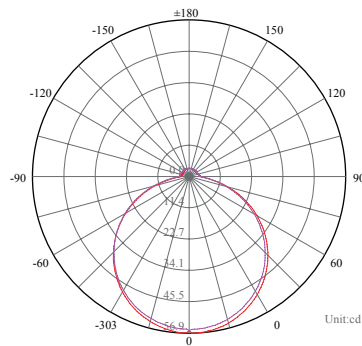

Lux distance Curve

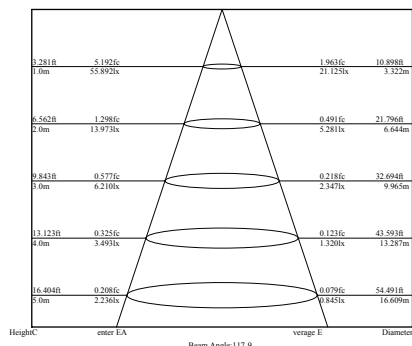

Illumination Picture

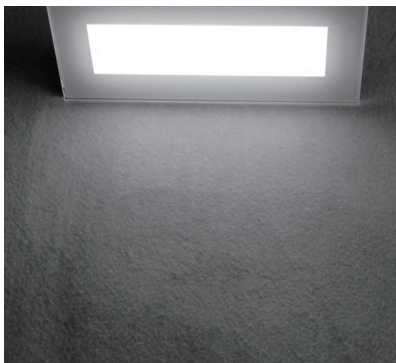

IP65 IK06




Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.

"Specification change without prior notification or public announcement."

www.Modernlite-light.com



PLAYLED.

PLAYLED.





General Data	
Item No.	SP-003-0400-AH
Power	4 Watts
LED type	18 pcs 2835 SMD LED
Luminous flux	85-95 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120°
Dimension	95x47 (mm) Diameter x Height
Cut out	75 mm
Net weight	0.35 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~240V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Tempered glass painted in milky white
Glass	Tempered Glass.T=5mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Grey.
Packaging	
Inner box size	125*125*95 mm
Carton size	64.3*39*21 cm (30 PCS / carton)

Passivated

3 Years Warranty

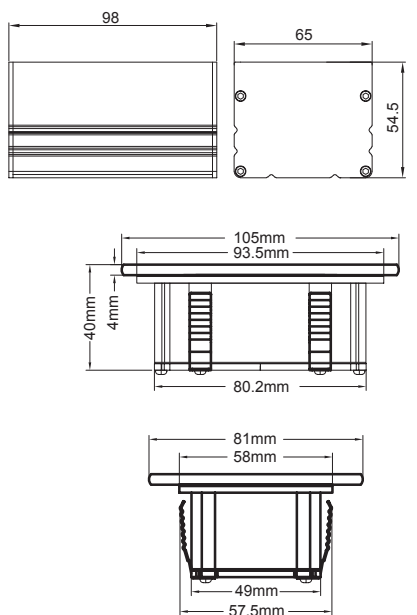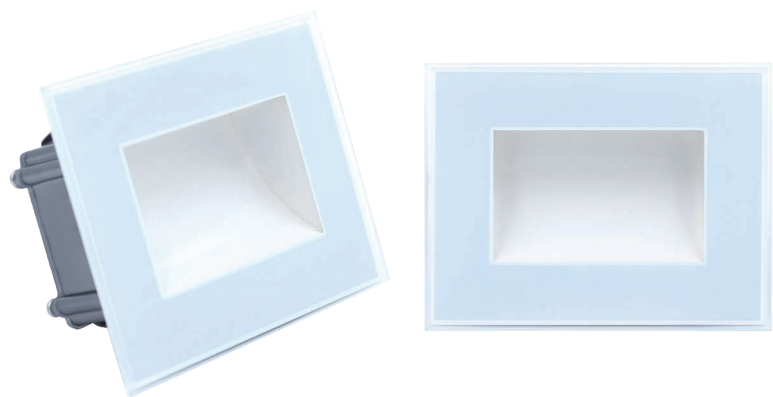

General Data	
Item No.	SP-001-0300-BH
Power	3 Watts
LED type	15 pcs 2835 SMD LED
Luminous flux	160~180 lm
CCT	2700K,3000K, 4000K, 6000K
CRI	80+
Beam angle	Asymmetric downward 45° x 120° (Tilt x Pan)
Dimension	105x81x40 mm (Length x Wide x Height)
Cut out	98 x 65x 54.5 mm
Net weight	0.371kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	AC100~265V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer


Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Tempered glass painted in milky white
Glass	Tempered Glass.T=4mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	Flat PMQ silicone seal
Accessories	
Mounting Sleeve	Aluminum
Packaging	
Inner box size	130*105*80 mm
Carton size	54*28.5*34 cm (32 PCS/carton)

Passivated

3 Years Warranty

Photometric Data (3000K, 120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

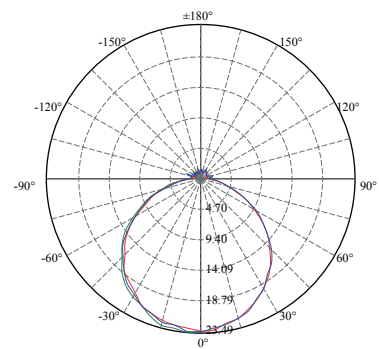

Lux distance Curve


Illuminance at a Distance			
Center Beam LUX		Beam Width V H	
2m	5.79 LUX	6.1m	6.2m
4m	1.45 LUX	12.1m	12.4m
6m	0.64 LUX	18.2m	18.7m
8m	0.36 LUX	24.3m	24.9m
10m	0.23 LUX	30.3m	31.1m
12m	0.16 LUX	36.4m	37.3m
Vert.Spread:113.3		Horiz.Spread:114.6	

Illumination Picture



Photometric Data (4000K, 45° x 120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

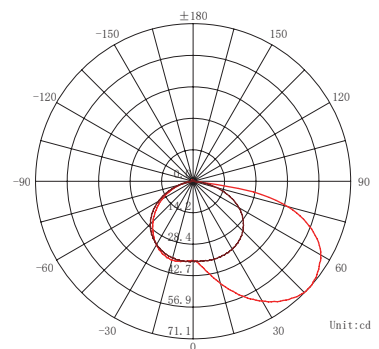

Lux distance Curve

Illuminance at a Distance			
Center Beam LUX		Beam Width V H	
2m	5.79 LUX	6.1m	6.2m
4m	1.45 LUX	12.1m	12.4m
6m	0.64 LUX	18.2m	18.7m
8m	0.36 LUX	24.3m	24.9m
10m	0.23 LUX	30.3m	31.1m
12m	0.16 LUX	36.4m	37.3m
Vert.Spread:113.3		Horiz.Spread:114.6	

Illumination Picture



IP65 IK06



IP65 IK06




Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.




"Specification change without prior notification or public announcement."

www.Modernlite-light.com



PLAYLED.

PLAYLED.

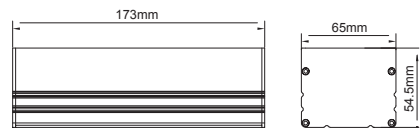

General Data

Item No.	SP-005-0500-BH
Power	5 Watts
LED type	30 pcs 2835 SMD LED
Luminous flux	380~400 lm
CCT	2700K,3000K, 4000K, 6000K
CRI	80+
Beam angle	Asymmetric downward 120°
Dimension	182x81x43 mm (Length x Wide x Height)
Cut out	173 x 65 x 54.5 mm
Net weight	0.450 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	AC100~265V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Built-in high voltage constant current driver with transformer

Construction Data

IP rating	IP65 Waterproof
IK rating	IK06
Housing	Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Tempered glass painted in milky white
Glass	Tempered Glass.T=4mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	Flat PMQ silicone seal

Accessories




Mounting Box	Aluminum
--------------	----------

Packaging

Inner box size	208*105*70 mm
Carton size	42*22*46 cm (24 PCS / carton)

Passivated

3 Years Warranty

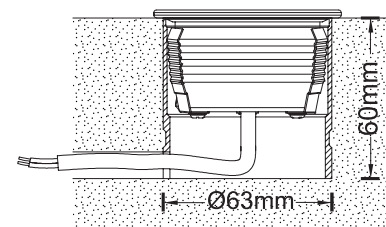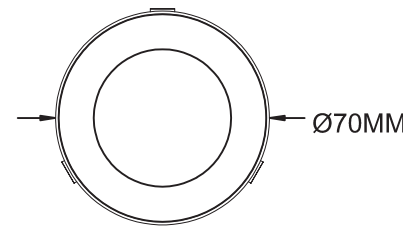

General Data

Item No.	SP-004-0500-B
Power	5 Watts
LED type	15 pcs 3030 LED
Luminous flux	200~220 lm
CCT	2700K,3000K,4000K,6000K,R/G/Y/B
CRI	80+
Beam angle	120°
Dimension	70 x 40 (mm) Diameter x Height
Cut out	63 mm
Net weight	0.26 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC24V
Insulation class	Class III
Cable	1PC rubber cable 0.3M H05RN-F 2x0.75mm square
Driver	Low voltage constant current output, excluding the transformer

Construction Data

IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Frosted Tempered Glass.
Glass	Tempered Glass.T=5mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal

Accessories

Mounting Sleeve	Anti-corrosion PVC. Grey.
Clip	With strong clip as options for ceiling lights application

Packaging


Inner box size	125*125*95 mm
Carton size	64.3*39*21 cm (30PCS / carton)

Passivated


3 Years Warranty

Photometric Data (3000K, 120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

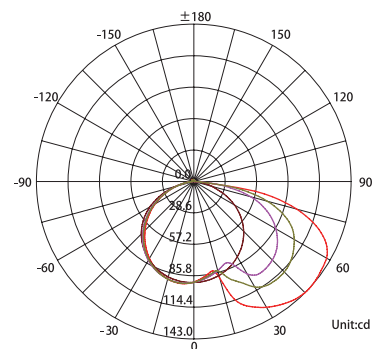

Lux distance Curve

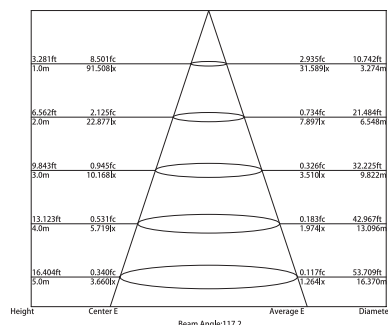


Illumination Picture




IP65 IK06

Photometric Data (3000K, 1x120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

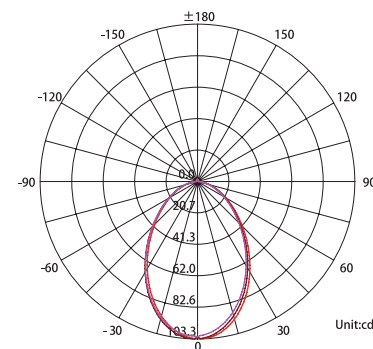


Lux distance Curve

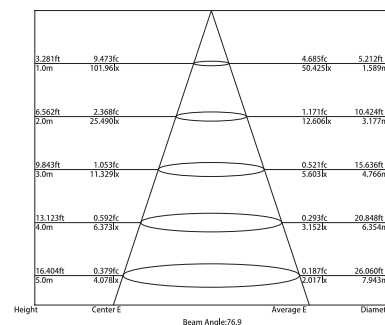

Illumination Picture



IP65 IK06



PLAYLED.

PLAYLED.



WALL LIGHTS SERIES

WALL LIGHTS SERIES

General Data	
Item No.	SP-004-1000-A
Power	10 Watts
LED type	12 pcs 3030 LED
Luminous flux	400~450 lm
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	120°
Dimension	95 x 47 (mm) Diameter x Height
Cut out	75 mm
Net weight	0.313 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 0.3M H05RN-F 2x0.75mm square
Driver	Low voltage constant current output ,excluding the transformer

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Frosted Tempered Glass.
Glass	Tempered Glass.T=5mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Grey.
Clip	With strong clip as options for ceiling lights application
Packaging	
Inner box size	125*125*95 mm
Carton size	64.3*39*21 cm (30PCS / carton)

Passivated

3 Years Warranty

General Data	
Item No.	SP-004-1000-RGB-A
Power	10 Watts
LED type	18 pcs 5050 RGB LED
Luminous flux	350 lm (All LEDs on)
CCT	RGB
CRI	70+
Beam angle	120°
Dimension	95 x 60 (mm) Diameter x Height
Cut out	75 mm
Net weight	0.440 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V
Insulation class	Class III
Cable	1PC rubber cable 0.3M H05RN-F 4x0.75mm square
Driver	Low voltage constant current output ,excluding the transformer


Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Frosted Tempered Glass
Glass	Tempered Glass.T=5mm.
Loading capacity	320 kgs
Cable Gland	PG9 IP67
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Grey.
Clip	With strong clip as options for ceiling lights application
Packaging	
Inner box size	125*125*95 mm
Carton size	64.3*39*21 cm (30PCS / carton)

Passivated


3 Years Warranty

Photometric Data (3000K, 1x120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

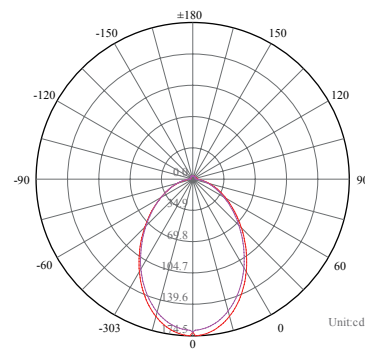

Lux distance Curve

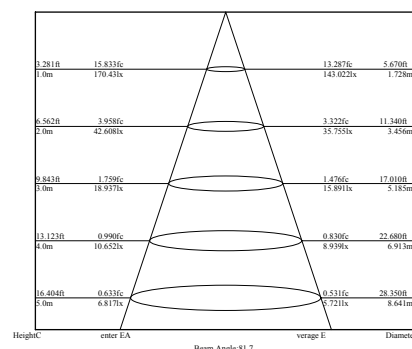


Illumination Picture




IP65 IK06

Photometric Data (RGB all LEDs on, 1x120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

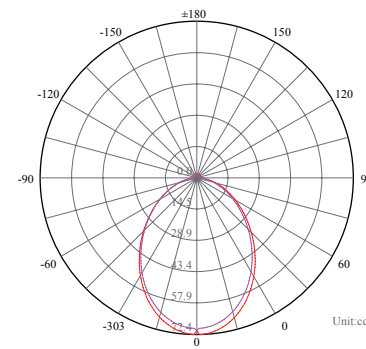

Lux distance Curve

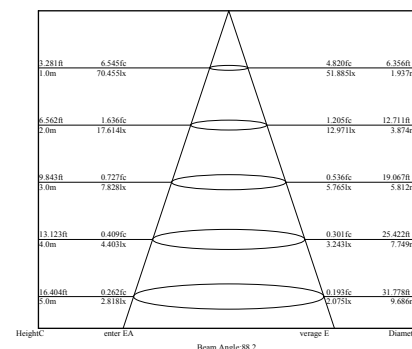

Illumination Picture



IP65 IK06



Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.

"Specification change without prior notification or public announcement."

www.Modernlite-light.com




Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.



PLAYLED.

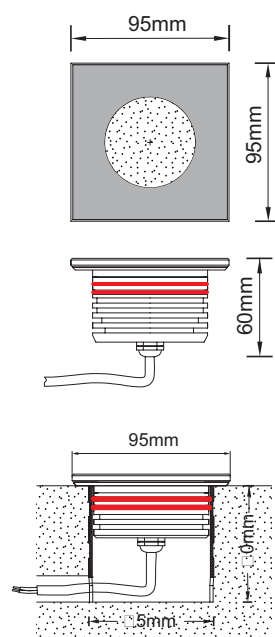

General Data

Item No.	SP-011-1000-A
Power	10 Watts (4 watts as options)
LED type	12 pcs 3030 SMD LED
Luminous flux	400~450 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120°
Dimension	95 x 95 x 47 (mm) Length x Wide x Height
Cut out	75 mm
Net weight	0.322 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	DC12V~DC24V
Insulation class	Class III
Cable	1PC rubber cable 0.3M H05RN-F 2x0.75mm square
Driver	Low voltage constant current output, excluding the transformer

Construction Data

IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Frosted Tempered Glass
Glass	Tempered Glass.T=5mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	O-ring PMQ silicone seal

Accessories

Mounting Sleeve	Anti-corrosion PVC. Grey.
-----------------	---------------------------

Packaging


Inner box size	125*125*95 mm
Carton size	64.3*39*21 cm (30PCS / carton)

Passivated


3 Years Warranty

Photometric Data (3000K, 1x120°) & Illumination Picture

Light Distribution Curve [Unit: cd]

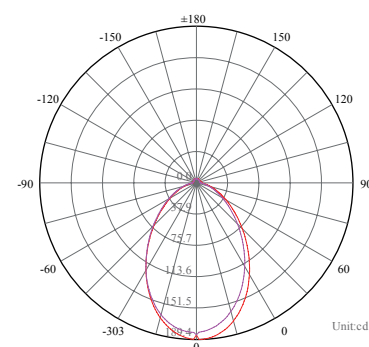

Lux distance Curve

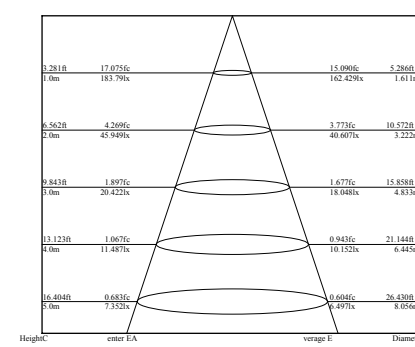

Illumination Picture



IP65 IK06



Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.


"Specification change without prior notification or public announcement."

www.Modernlite-light.com

WALL LIGHTS SERIES



PLAYLED.

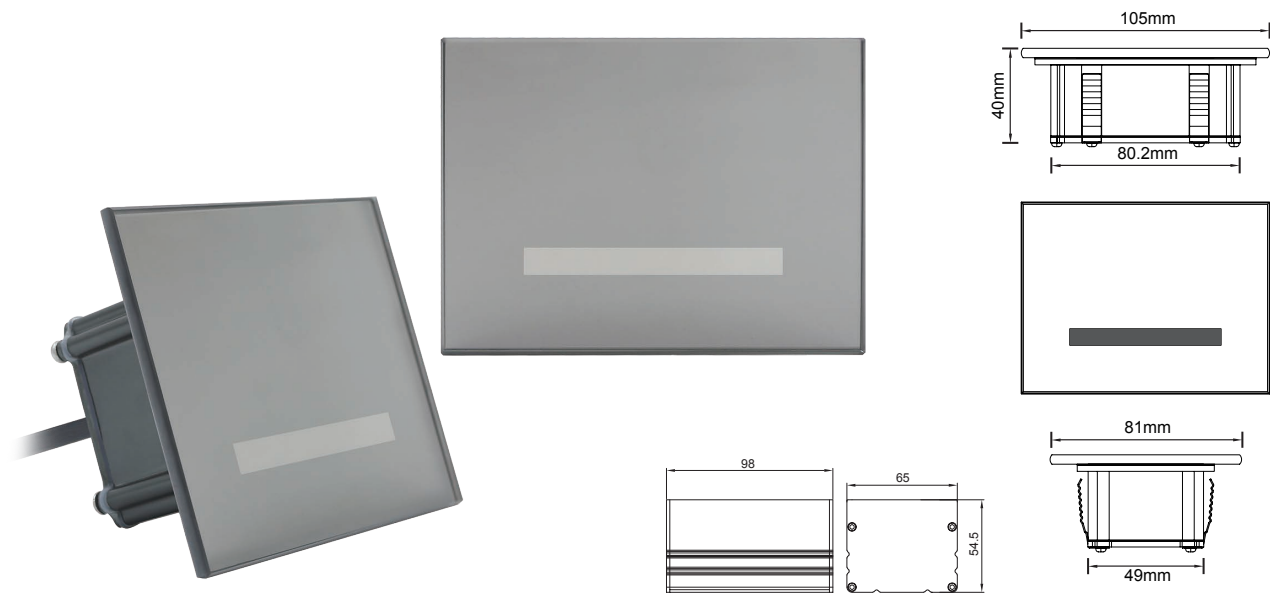

General Data

Item No.	SP-009-0500-BH
Power	5 Watts
LED type	8 PCS OSRAM 3030 LED
Luminous flux	95~120 lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	120° (Asymmetrical downward beam)
Dimension	105x81x40 mm (Length x Wide x Height)
Cut out	98x65x54.5 mm (LxWxH)
Net weight	0.369 kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data

Input voltage	AC100~240V
Insulation class	Class I
Cable	1 x cable 0.3 M H05RN-F 3x0.75mm square to open wires
Driver	Low voltage constant current output, excluding the transformer

Construction Data

IP rating	IP65 Waterproof
IK rating	IK06
Housing	Solid Passivated (Anodizing) Aluminum CNC machined
Protection finishing	20~25µm thickness anodized film for housing .Dark grey
Trim	Tempered glass painted in black
Glass	Tempered Glass.T=4mm.
Loading capacity	320 kgs
Cable Gland	PG7 IP67
Gasket	Flat PMQ silicone seal

Accessories

Mounting Sleeve	Aluminium
-----------------	-----------

Packaging


Inner box size	130*105*80 mm
Carton size	54x28.5x34 cm (32 PCS items each carton)

Passivated


3 Years Warranty

Photometric Data (3000K, 120°) & Illumination Picture


Light Distribution Curve [Unit: cd]

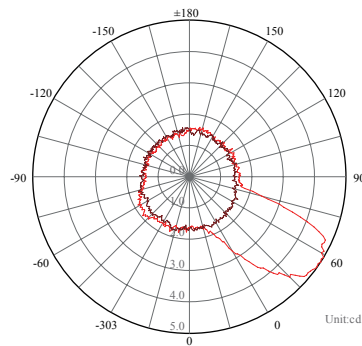

Lux distance Curve

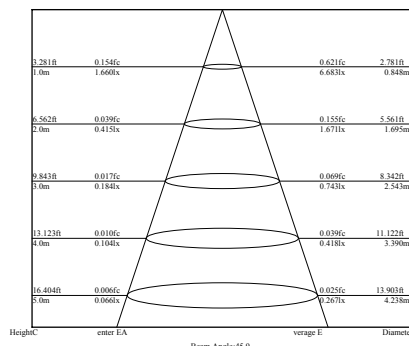

Illumination Picture

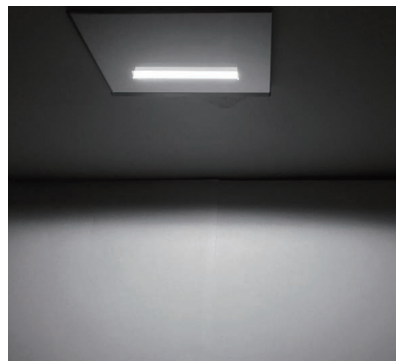

IP65 IK06



Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.


"Specification change without prior notification or public announcement."

www.Modernlite-light.com



Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.



PLAYLED.

PLAYLED.



WALL LIGHTS SERIES


WALL LIGHTS SERIES

General Data	
Item No.	SP-006-0300-A PC
Power	3 Watts
LED type	1 PC CREE XPE LED (WW, NW , CW:1 Watt to 3 Watt optional)
Luminous flux	110~130lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	30°
Dimension	70 x 34.5 (mm) Diameter x Height
Cut out	62 mm
Net weight	0.225 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V/DC24V (AC100~265V optional)
Insulation class	Class III
Cable	1 x cable 0.3 M H05RN-F 2x0.5mm square to open wires
Driver	Low voltage constant current output ,excluding the transformer. (With separately driver for options)

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Polished chrome Aluminium
Protection finishing	Polished chrome
Trim	Polished chrome Aluminium
Glass	Tempered glass
Loading capacity	320 kgs
Cable Gland	IP65 Aluminium part
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Grey.
Packaging	
Inner box size	75*75*65 mm
Carton size	40*17.5*15.5 cm (20 PCS items each carton)

3 Years Warranty

Replaceable LED module !



General Data	
Item No.	SP-006-0300-A SN
Power	3 Watts
LED type	1 PC CREE XPE LED (WW, NW , CW:1 Watt to 3 Watt optional)
Luminous flux	110~130lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	80+
Beam angle	30°
Dimension	70 x 34.5 (mm) Diameter x Height
Cut out	62 mm
Net weight	0.225 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V/DC24V (AC100~265V optional)
Insulation class	Class III
Cable	1 x cable 0.3 M H05RN-F 2x0.5mm square to open wires
Driver	Low voltage constant current output ,excluding the transformer (With separately driver for options)

Construction Data	
IP rating	IP65 Waterproof
IK rating	IK06
Housing	Satin Nickel Aluminium
Protection finishing	Satin Nickel
Trim	Satin Nickel Aluminium
Glass	Tempered glass
Loading capacity	320 kgs
Cable Gland	IP65 Aluminium part
Gasket	O-ring PMQ silicone seal
Accessories	
Mounting Sleeve	Anti-corrosion PVC. Grey.
Packaging	
Inner box size	75*75*65 mm
Carton size	40*17.5*15.5 cm (20 PCS items each carton)


3 Years Warranty

Replaceable LED module !




Photometric Data (3000K, 30°) & Illumination Picture

Light Distribution Curve [Unit: cd]

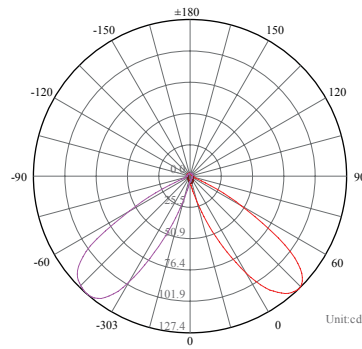

Lux distance Curve

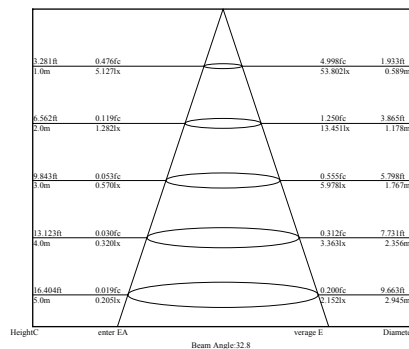


Illumination Picture




IP67 IK06

Photometric Data (3000K, 30°) & Illumination Picture

Light Distribution Curve [Unit: cd]

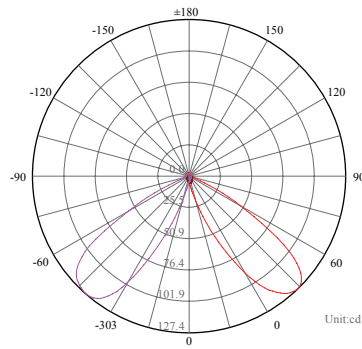

Lux distance Curve

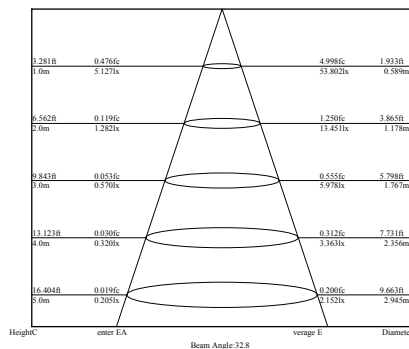

Illumination Picture



IP67 IK06



Standards

-IEC/EN60598-1,
-IEC/EN60598-2-1,
-IEC/EN60598-2-2.

"Specification change without prior notification or public announcement."

www.Modernlite-light.com